


BRIDGE & SUPPLY CO.

400 Stoney Creek Dr., P.O. Box 151, Sandusky, MI 48471 (810) 648-3000, Fax: (810) 648-3549
9610 County Road 14, Wauseon, OH 43567 (419) 335-3200, Fax: (419) 335-3201

CLIP LOC III


CUSTOM LENGTH COMMERCIAL, INDUSTRIAL, ARCHITECTURAL, CLIP FASTENED PANEL

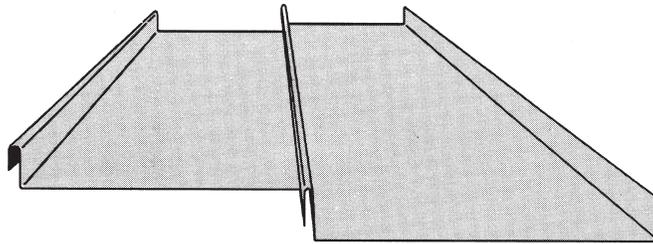

- Concealed Fasteners
 - Architectural/Structural Integral Standing
 - Seam Panel
 - 15-3/4" Panel Coverage, 1-1/2" Rib Height
 - Gauges: 26GA, 24GA
 - Minimum Roof Slope: 1.5:12
 - Available Flat Pan, with Stiffener Ribs or Striated
 - Snap Together Panel System
 - Designed to Accommodate 1/2" to 3" Blanket Insulation
 - Concealed Clip Designed to Accommodate Movement Due to Temperature Change
 - Applies Over Open Framing or Solid Substrate
 - Available Finishes Include Fluorocarbon, Fluoropolymer, and Bare Galvalume™
 - Panels Cannot be End Lapped
 - 24 Gauge UL Class 90 Rated
-
-


CLIP LOC II

TECHNICAL INFORMATION

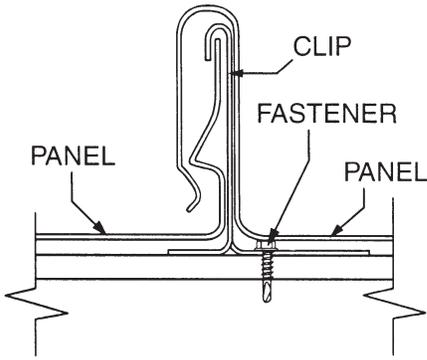


LAP DETAIL


PANEL CLIPS




STANDARD

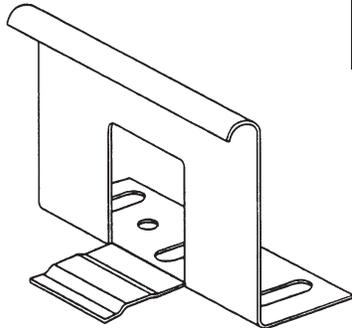


UL90

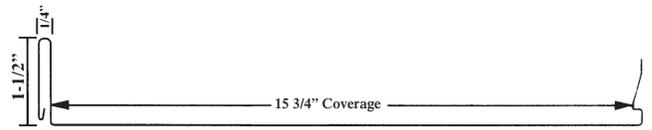

FLAT PAN

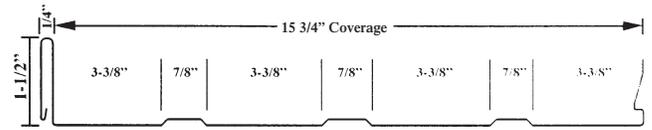

STIFFENER RIBS



WITH STRIATIONS

NOTE: Please specify with ribs, without ribs or with striations when ordering.

TESTING:

- 1) UL 580 Class 90 Wind Uplift.
- 2) ASTM E-84 Class A Flame Spread.
- 3) ASTM E-283 Air Infiltration Approved.
- 4) ASTM E-331 Water Penetration Approved.

PAINT FINISH:

ASTM E-84 FIRE HAZARD - Flame spread of not more than 25. Class A.

ASTM 3363 PENCIL HARDNESS - HB min.

ASTM D-2244 COLOR CHANGE - No more than 2 NBS units after 2000 hours.

ASTM D-4214 CHALKING - No more than #8 rating after 3000 hours.

ASTM B-117 SALT SPRAY - No loss of adhesion after 3000 hours.