
Seam Tite



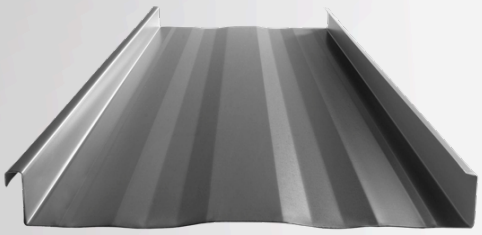

A 2" high mechanically seamed panel designed for commercial and low-slope roofing applications. Engineered for strength and weather-tight performance, it features a specially designed clip system that allows for thermal movement, ensuring long-term durability and reliability.


PAINT FINISH / PERFORMANCE PROPERTIES

- ☑ 24GA Polyvinylidene Fluoride (PVDF) features a 40 year warranty with:
  Top Coat: .2 Mils DFT Primer, .8 Mils DFT Top Coat
  Bottom Coat: .2 Mils DFT Primer, .3 Mils DFT Backer
- ☑ ASTM D 3361 Accelerated Weathering -No more that #8 rating after 1,000 hrs
- ☑ ASTM B 117 Salt Spray -No more than #7 rating, 1/16" (2mm), after 1,000 hrs
- ☑ ASTM D 2247 Humidity -No more that #10 rating, no blisters, after 2,000 hrs
- ☑ ASTM D 3363 Pencil Hardness - HB-2H minimum
  ASTM E 84 Flame Test - Class A coating

SEAM TITE DETAILS

- ☑ **Specially designed clip for thermal movement**
- ☑ **Minimum roof slope: .75/12**
- ☑ **Available in flat pan, striated & with stiffener ribs**
- ☑ **Gauges: 24GA**
- ☑ **18.75" Wide 2" High Seams**
- ☑ **Concealed Fasteners**


2" High Seam Tite 18.75" Wide Panels

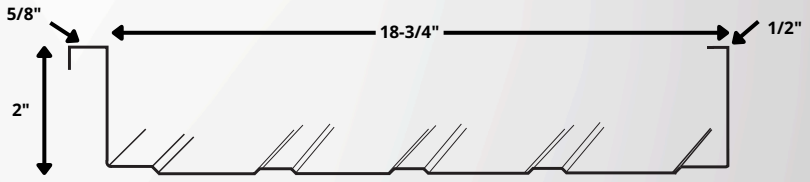

WITH RIBS



FLAT PAN

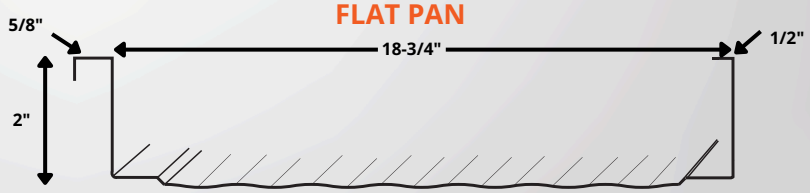

WITH STRIATIONS