




# **Jensen** BRIDGE & SUPPLY COMPANY


## **SLR PANEL**


*Standing Loc Rib*

**CUSTOM LENGTH CONCEALED FASTENER PANEL**

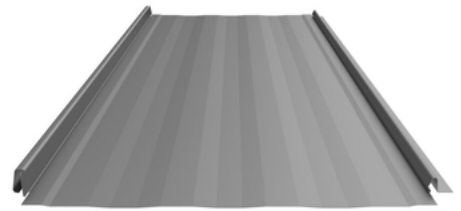

**CALL US FOR MORE INFO**


 810-648-3000 - Sandusky, MI

 419-335-3200 - Wauseon, OH

- ✓ Architectural/residential standing seam panel
- ✓ Gauges: 29GA, 26GA & 24GA
- ✓ Concealed fasteners
- ✓ Minimum roof slope: 3:12
- ✓ Nail strip panel system with pre-cut slots for pancake screws
- ✓ Applies over solid substrate
- ✓ Panels cannot be end lapped
- ✓ Available in flat pan, striated or with stiffener ribs



**45 YEAR PAINT  
WARRANTY ON  
26GA & 29GA**



**12" OR 16" PANEL  
COVERAGE,  
1" RIB HEIGHT**




**AVAILABLE  
IN LENGTHS  
2' - 60'**

# SLR PANEL

## TECHNICAL INFORMATION

### DETAILS

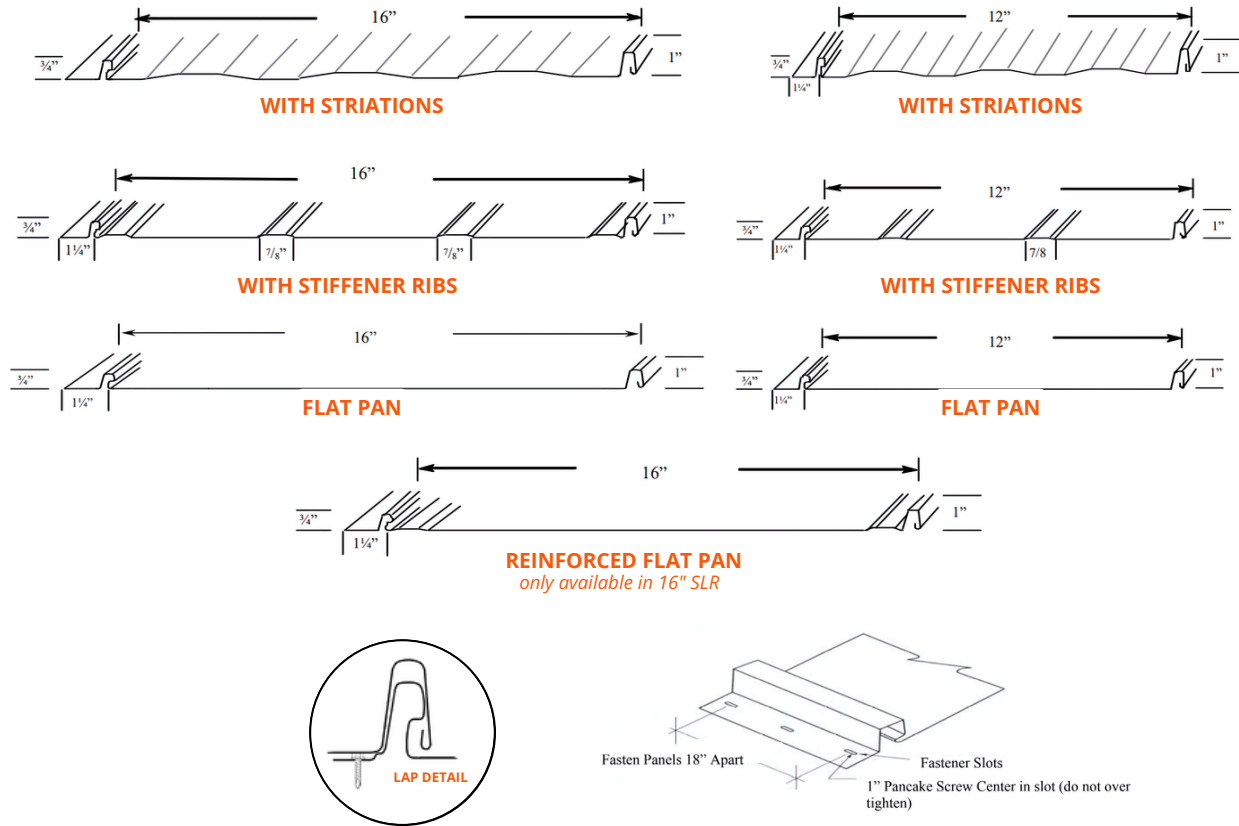

### PAINT FINISH

#### AKZONOBEL CERAM-A-STAR 1050 SILICONIZED POLYESTER PAINT

- ☑ 29GA or 26GA Glossy features a 45 year warranty with:
  - Top Coat: .2 Mils Yellow Ultra Flex Primer, .8 Mils Siliconized Polyester
  - Bottom Coat: .2 Mils Yellow Ultra Flex Primer, .3 Mils Polyester Backer
- ☑ 24GA Glossy features a 40 year warranty with:
  - Top Coat: .2 Mils DFT Primer, .8 Mils DFT Top Coat
  - Bottom Coat: .2 Mils DFT Primer, .3 Mils DFT Backer

### PERFORMANCE PROPERTIES

- ☑ ASTM D 3361 Accelerated Weathering — No more that #8 rating after 1,000 hours
- ☑ ASTM B 117 Salt Spray — No more than #7 rating, 1/16" (2mm), after 1,000 hours
- ☑ ASTM D 2247 Humidity — No more that #10 rating, no blisters, after 2,000 hours
- ☑ ASTM D 3363 Pencil Hardness — HB—2H minimum
- ☑ ASTM E 84 Flame Test — Class A coating

