




CL2 PANEL

Clip Loc II

CUSTOM LENGTH CONCEALED CLIP FASTENER PANEL

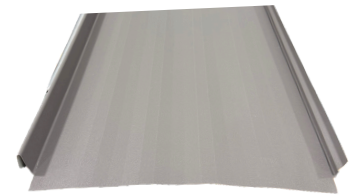

CALL US FOR MORE INFO

☎ 810-648-3000 - Sandusky, MI

☎ 419-335-3200 - Wauseon, OH

- ✓ Architectural/residential standing seam panel
- ✓ Gauges: 29GA, 26GA & 24GA
- ✓ Concealed fasteners
- ✓ Minimum roof slope: 1.5:12
- ✓ Concealed clip designed to accommodate movement to temperature change
- ✓ Applies over solid substrate
- ✓ Panels cannot be end lapped
- ✓ Available in flat pan, striated or with stiffener ribs



**45 YEAR PAINT
WARRANTY ON
26GA & 29GA**



**15.75" OR 11.75"
PANEL COVERAGE,
1.5" RIB HEIGHT**





**AVAILABLE
IN LENGTHS
2' - 60'**

CL2 PANEL

TECHNICAL INFORMATION

DETAILS

1-1/2" High Custom Length Clip Fastened Panel

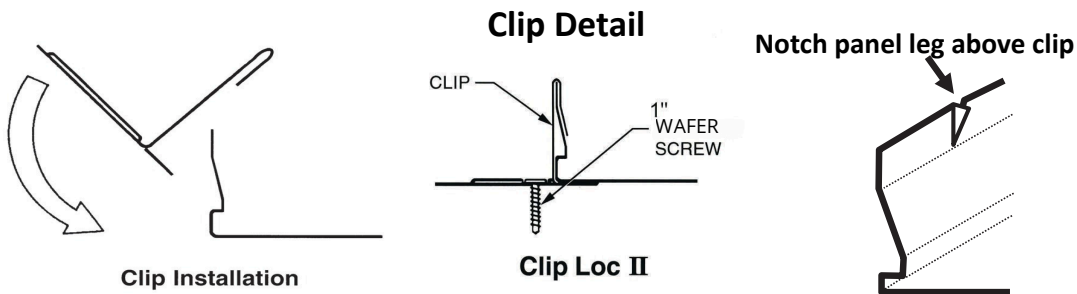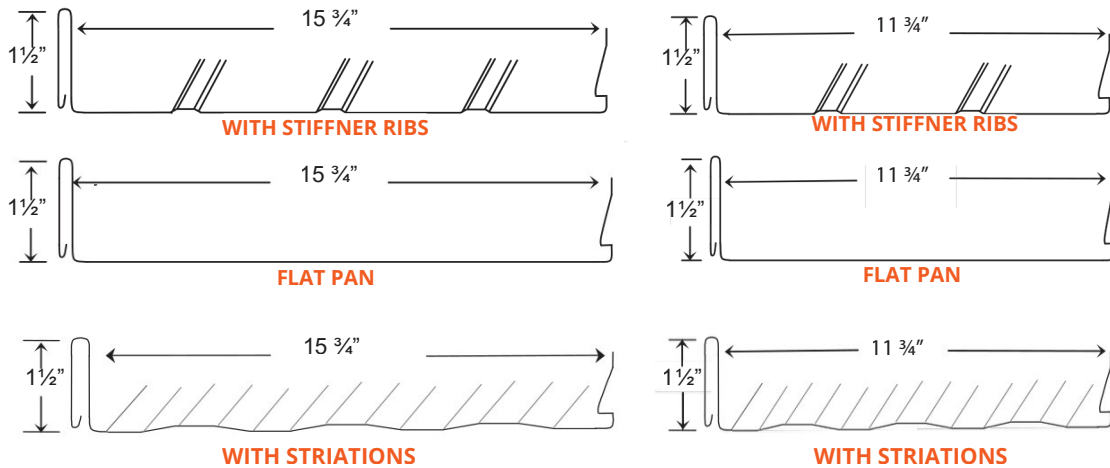

PAINT FINISH

AKZONOBEL CERAM-A-STAR 1050 SILICONIZED POLYESTER PAINT

- ☑ 29GA or 26GA Glossy features a 45 year warranty with:
Top Coat: .2 Mils Yellow Ultra Flex Primer, .8 Mils Siliconized Polyester
Bottom Coat: .2 Mils Yellow Ultra Flex Primer, .3 Mils Polyester Backer
- ☑ 24GA Glossy features a 40 year warranty with:
Top Coat: .2 Mils DFT Primer, .8 Mils DFT Top Coat
Bottom Coat: .2 Mils DFT Primer, .3 Mils DFT Backer

PERFORMANCE PROPERTIES

- ☑ ASTM D 3361 Accelerated Weathering — No more that #8 rating after 1,000 hours
- ☑ ASTM B 117 Salt Spray — No more than #7 rating, 1/16" (2mm), after 1,000 hours
- ☑ ASTM D 2247 Humidity — No more that #10 rating, no blisters, after 2,000 hours
- ☑ ASTM D 3363 Pencil Hardness — HB—2H minimum
- ☑ ASTM E 84 Flame Test — Class A coating

