




Seam Tite

2" High Mechanically Seamed Panel

CUSTOM LENGTH CONCEALED FASTENER

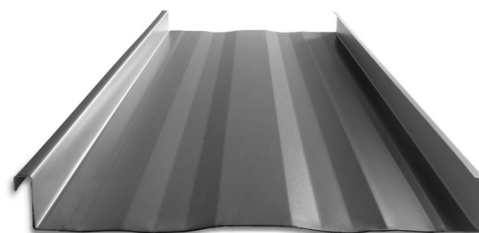

CALL US FOR MORE INFO

☎ 810-648-3000 - Sandusky, MI

☎ 419-335-3200 - Wauseon, OH

- ✓ Architectural/Structural
- ✓ Available flat pan, striated or with ribs
- ✓ Concealed fasteners
- ✓ Applied over solid substrate or open purlins
- ✓ Gauges: 24GA
- ✓ 2" rib height with integrated clip relief off-set
- ✓ Specially designed clip for thermal movement
- ✓ 18.75" lapped panel coverage
- ✓ Minimum roof slope: .75:12



**40 YEAR PAINT
WARRANTY ON
24GA**



**18.75" WIDE
2" RIB HEIGHT**




**AVAILABLE
IN LENGTHS
1' TO 50'**

Seam Tite Panel

TECHNICAL INFORMATION

DETAILS

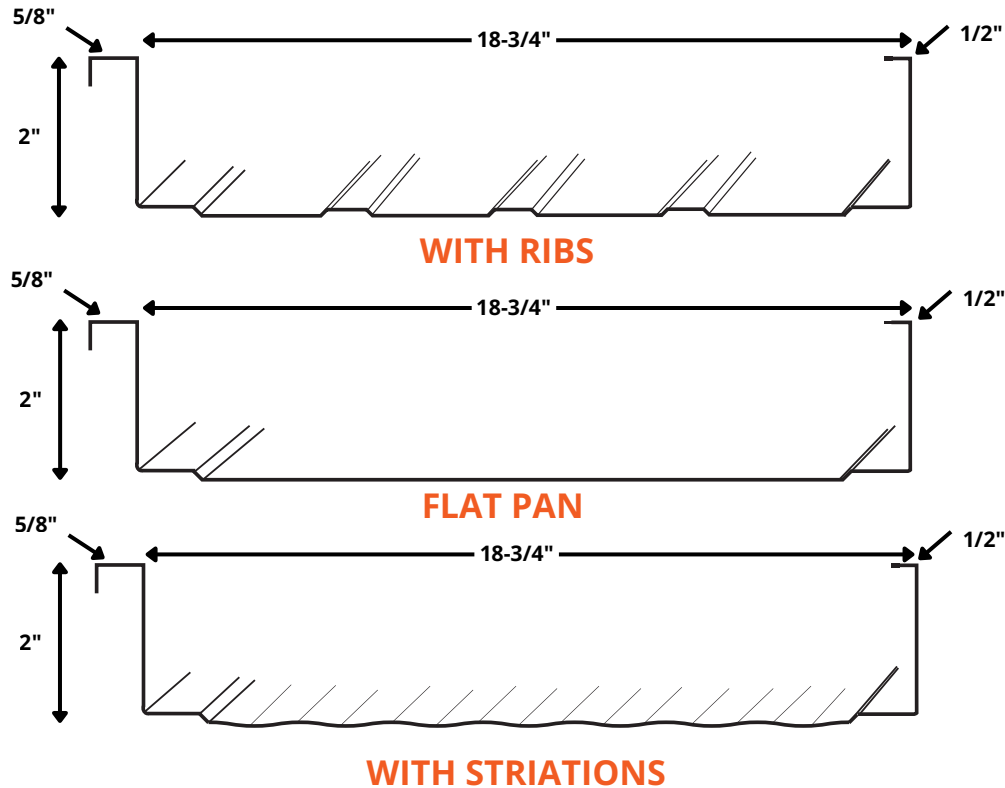

PAINT FINISH

- ☑ 24GA Polyvinylidene Fluoride (PVDF) features a 40 year warranty with:
Top Coat: .2 Mils DFT Primer, .8 Mils DFT Top Coat
Bottom Coat: .2 Mils DFT Primer, .3 Mils DFT Backer

PERFORMANCE PROPERTIES

- ☑ ASTM D 3361 Accelerated Weathering — No more that #8 rating after 1,000 hours
- ☑ ASTM B 117 Salt Spray — No more than #7 rating, 1/16" (2mm), after 1,000 hours
- ☑ ASTM D 2247 Humidity — No more that #10 rating, no blisters, after 2,000 hours
- ☑ ASTM D 3363 Pencil Hardness — HB—2H minimum
- ☑ ASTM E 84 Flame Test — Class A coating

